


Custom Battery Manufacturer

Lithium-ion Polymer Battery





Model: UFX 751355 500mAh 3.7V

Drawing Of Battery Pack

| lectrica Characteristic | С | harging&Discharge Characteristic | |
|--|----------------------|---------------------------------------|-------------------|
| Nominal Capacity (0.5C Cont., 2.75V cut-off) | 500mAh ∎ | Standard Charge Current | 250mA |
| Nominal Voltage | 3.7 V ■ | Max. Continous Charge Current | 500mA |
| Resistance | ≤180 mΩ ∎ | Charge Cut-off Voltage | 4.2 V |
| Cycle Life@0.5C/0.5C@25±5 ℃ | >300 times ∎ | Standard Discharge Current | 250mA |
| Self Discharge Rate | ≤3% per month@25°C ∎ | Max. Continous Disharge Current | 500mA |
| lechanical Characteristic | - | Disharge Cut-off Voltage | 2.75 \ |
| Typical Weight | 9.58 g T | emperature Characteristic | |
| Dimensions | T7.5×W13×H57 mm ■ | Discharge Temperature | -20~60 °C |
| Wire | UL1571 26AWG • | Charge Temperature | 0~45 °C |
| Connector | - | Recommend Storage Temperature | -20~4 5 °C |
| pical Applications | P | CM Specification | |
| Beauty Devices | | Over-charge Protection Voltage | 4.280±0.050 |
| Healthcare Devices | | Over-discharge Protection Voltage | 2.400±0.100 |
| Smart Device | | Over-current Protection for Discharge | 3.2±0.5 / |
| Digital Productions | | Short Circuit Protection | Available |
| Wearable Devices | | NTC | N |
| Power Tools | С | ertificates | |
| 1/IEino | | MSDS | |
| OFILE | | | |
| Sustom Battery Manufacturer | | | |

Custom Battery Manufacturer

Guangdong Ufine New Energy Co.,Ltd

Email: sales@ufinebattery.com

https://www.ufinebattery.com/



Custom Battery Manufacturer


Typical Performance Discharge Curve At Diffierent Temperature Curve Of Diffierent Discharge Rate Charge: CC-CV, 0.5C, 4.2V, 0.02C cut off@25°C Discharge:CC, 0.2C/0.5C/1.0C, 2.75V cut off 4.2 −20°C 0°C 4. 0 4.2 25℃ 40℃ 3.8 40 60°C 3.8 3.6 (A)€ 3.6 3.4 Voltage Voltage 3. 2 3.2 3. 0 3.0 2.8 2.8 2.6 2.6 2.4 0 10 20 30 40 50 60 70 80 90 100 110 20 100 0 40 60 80 Capacity (%) Capacity (%)

Self Discharge Curve At Diffierent Temperature

Charge: CC-CV, 0.5C, 4.2V, 0.02C cut off @25 Discharge: CC, 0.5C, 2.75V cut off @25*C After standard charging, store cell @ 25°C 4.4 4.2 100 1٢ S^{4.0} Capacity Remained(%) 8 Circuit Voltage (7 60 3.2 40 0 3.2 Obeu 0 20 2.8 70% S00 100% SOC 2.6 100 150 0 50 250 300 350 400 200 0 100 400 500 300 200 0 Cycle Life (Times) Time (days)

Cycle Life Curve

Charging Characteristic

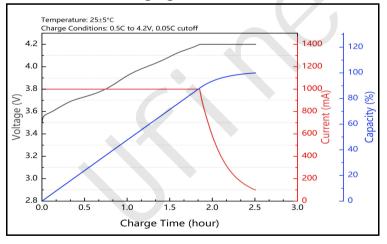



Custom Battery Manufacturer

Guangdong Ufine New Energy Co.,Ltd

Email: sales@ufinebattery.com

https://www.ufinebattery.com/



Warning and Cautions

Warning

Danger warning(it should be described in manual or instruction for users, indicated especially) to prevent the possibility of the battery

from leaking, heating, explosion. Please observe the following precautions:

- Don't immerse the battery in water and seawater. Please put it in cool and dry environment if no using.
- Do not discard or leave the battery near a heat source as fire or heater.
- Being charged, using the battery charger specifically for that purpose.
- Don't reverse the positive and negative terminals.
- Don't connect the battery to an electrical outlet directly.
- Don't connect the positive and negative terminal directly with metal objects such as wire. Short terminals of battery is strictly prohibited, it may damage battery.
- Do not transport and store the battery together with metal objects such as necklaces, hairpins.
- Do not strike, throw or trample the battery.
- Do not directly solder the battery and pierce the battery with a nail or other sharp object.
- Prohibition of use of damaged cells.
- Don't fall, hit, bend battery body.
- Battery pack designing and packing Prohibition injury batteries.
- Never disassemble the cells.
- Keep the battery away from babies.

Cautions

- Do not use or leave the battery at very high temperature conditions(for example, strong direct sunlight or a vehicle in extremely hot conditions).
 Otherwise,
- it can overheat or fire or its performance will be degenerated and its service life will be decreased.
- Do not use it in a location where is electrostatic and magentic greatly, otherwise, the safety devices may be damaged, causing hidden trouble of safety.
- If the battery leaks, and the electrolyte get into the eyes. Do not wipe eyes, instead, rinse the eyes withclean water, and immediately seek medical attention. Otherwise, eyes injury can result.
- If the battery gives off an odor, generates heat, becomes discolored or deformed, or in any way appear abnormal during use, recharging or storage, immediately remove it from the device or battery charger and stop using it.
- In case the battery terminals are dirt, clean the terminals with a dry cloth before use. Otherwise power failure or charge failure may occur due to the poor
 - connection with the instrument.



Custom Battery Manufacturer Guangdong Ufine New Energy Co.,Ltd Email: sales@ufinebattery.com https://www.ufinebattery.com/