
Lithium-ion Polymer Battery





Model: UFX 753450 1300mAh 3.7V

Drawing Of Battery Pack

1300mAh ■ 3.7 V ■ ≤160 mΩ ■ >300 times ■ er month@25℃ ■	Max. Continous Charge Current Charge Cut-off Voltage Standard Discharge Current	260mA 1300mA 4.2 V 260mA 1300mA 2.75 V
3.7 V ■ ≤160 mΩ ■ >300 times ■ er month@25℃ ■	Max. Continous Charge Current Charge Cut-off Voltage Standard Discharge Current Max. Continous Disharge Current	1300mA 4.2 V 260mA 1300mA
≤160 mΩ ■ >300 times ■ er month@25℃ ■	Charge Cut-off Voltage Standard Discharge Current Max. Continous Disharge Current	4.2 V 260mA 1300mA
>300 times ■ er month@25°C ■	Standard Discharge Current Max. Continous Disharge Current	260mA 1300mA
er month@25℃ ■	Max. Continous Disharge Current	1300mA
■ 43 g T	Disharge Cut-off Voltage	2.75 \/
43 g		2.73 V
	Temperature Characteristic	
×W34×H52 mm ■	Discharge Temperature	-20~60 ℃
JL1571 24AWG •	Charge Temperature	0~45 ℃
	Recommend Storage Temperature	-20~45 ℃
Р	PCM Specification	
	Over-charge Protection Voltage	4.280±0.050 V
	Over-discharge Protection Voltage	2.400±0.100 V
	Over-current Protection for Discharge	3.2±0.5 A
	Short Circuit Protection	Available
	NTC	No
C	Certificates	
	I.C	
	×W34×H52 mm ■ JL1571 24AWG ■ F	DL1571 24AWG Charge Temperature Recommend Storage Temperature PCM Specification Over-charge Protection Voltage Over-discharge Protection Voltage Over-current Protection for Discharge Short Circuit Protection



Custom Battery Manufacturer

Guangdong Ufine New Energy Co.,Ltd

Email: sales@ufinebattery.com


https://www.ufinebattery.com/




Typical Performance

Curve Of Diffierent Discharge Rate


Discharge Curve At Diffierent Temperature

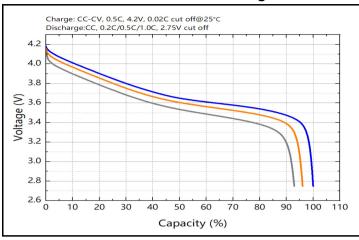


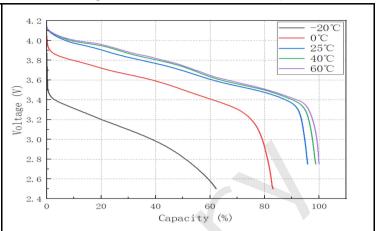


Self Discharge Curve At Diffierent Temperature

Cycle Life Curve

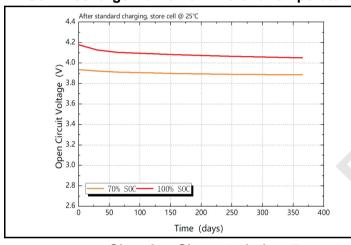



Charging Characteristic

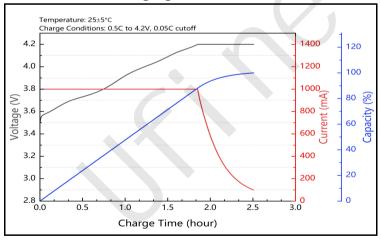



Custom Battery Manufacturer

Guangdong Ufine New Energy Co.,Ltd

Email: sales@ufinebattery.com

https://www.ufinebattery.com/



Custom Battery Manufacturer

Warning and Cautions

Warning

Danger warning(it should be described in manual or instruction for users, indicated especially) to prevent the possibility of the battery from leaking, heating, explosion. Please observe the following precautions:

- Don't immerse the battery in water and seawater. Please put it in cool and dry environment if no using.
- Do not discard or leave the battery near a heat source as fire or heater.
- Being charged, using the battery charger specifically for that purpose.
- Don't reverse the positive and negative terminals.
- Don't connect the battery to an electrical outlet directly.
- Don't connect the positive and negative terminal directly with metal objects such as wire. Short terminals of battery is strictly prohibited, it may damage battery.
- Do not transport and store the battery together with metal objects such as necklaces, hairpins.
- Do not strike, throw or trample the battery.
- Do not directly solder the battery and pierce the battery with a nail or other sharp object.
- Prohibition of use of damaged cells.
- Don't fall, hit, bend battery body.
- Battery pack designing and packing Prohibition injury batteries.
- Never disassemble the cells.
- Keep the battery away from babies.

Cautions

- Do not use or leave the battery at very high temperature conditions(for example, strong direct sunlight or a vehicle in extremely hot conditions). Otherwise,
 - it can overheat or fire or its performance will be degenerated and its service life will be decreased.
- Do not use it in a location where is electrostatic and magentic greatly, otherwise, the safety devices may be damaged, causing hidden trouble of safety.
- If the battery leaks, and the electrolyte get into the eyes. Do not wipe eyes, instead, rinse the eyes withclean water, and immediately seek medical attention. Otherwise, eyes injury can result.
- If the battery gives off an odor, generates heat, becomes discolored or deformed, or in any way appear abnormal during use, recharging or storage, immediately remove it from the device or battery charger and stop using it.
- In case the battery terminals are dirt, clean the terminals with a dry cloth before use. Otherwise power failure or charge failure may occur due to the
 - connection with the instrument.



Custom Battery Manufacturer

Guangdong Ufine New Energy Co.,Ltd

Email: sales@ufinebattery.com

https://www.ufinebattery.com/